

UW-94-P

DESCRIPTION:

Amplifier UW-94-P is used in the 1S91M1/M2 systems. It replaces tube amplifiers UW 94 and UW 1032.

It is used in receive channel to amplify microwave signals in C band. The amplifier is protected by a solid-state limiter and it May operate with input peak power up to 10 W.

Environment:



Operational temperature:	-40 ™ +60 ™
Humidity	98%/+25 ™
Vibration	20m/s ² /30 Hz
Shocks	100m/s ²

Basic electrical parameters:

Operational bandwidth:	5.5 ÷ 7.5 GHz
Gain:	G ≥30 dB
Noise figure:	NF ≤5 dB (max) NF ≤3.5 dB (typical)
VSWR	≤2.5
Power supply:	+27 V

Additional information:

The amplifier UW-94-P has waveguide input and output which allows direct replacing of tube amplifiers.

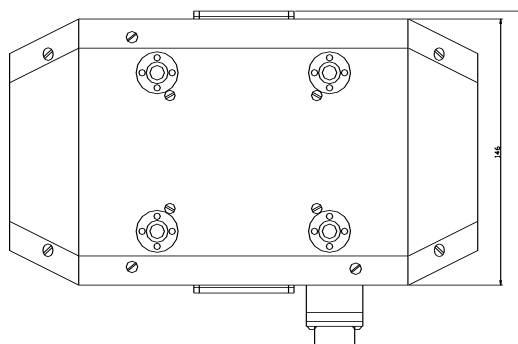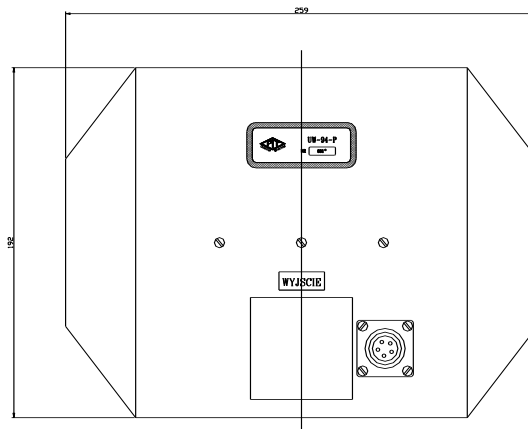

PIT - RADWAR S.A. WROCLAW DIVISION

50-425 Wrocław, ul. Krakowska 64, Poland; tel. (+48) 71-342-65-54; fax (+48) 71-342-58-59; e-mail: sales@dolam.pl
53-439 Wrocław, ul. Grabiszyńska 97 tel. (+48) 71-361-18-19 ; fax. (+48) 71-361-73-19; e-mail: office@pitow.wroc.pl